

0-3.8GHz 5W Dummy Load / Termination Load

P/N: VN-LD-3.8G-5W-OX



Operating Frequency( GHz )	0-3.8
Impedance( Ohm )	50
VSWR	≤1.20
IM <sub>3</sub> (dBc @ 2×34dBm)	-110 / -120
Application	Indoor & Outdoor
Degree of Protection	IP65
Handling Power (Watt max.)	5
Operating Temperature( °C )	-40 ~ + 80
Body Material	Aluminum
Connector Material	Brass(Silver plating for Inner Contact and Tri-metal plating for Outer Contact)


OX in P/N	Interface	Dimensions(mm/inch) (excluding connector)	Net Weight (g)	Packing Weight (kg /- pcs)	Packing Dimensions (mm/inch)(L×W×H)	Packing Carton Size (mm/inch)(L×W×H)
ONm	N Male	30×Φ16 / 1.18×Φ0.63	40±10	5/100	40×40×50 /1.57× 1.57×1.97	220×220×215 / 8.67×8.67×8.46
ONf	N Female					
ODm	Din Male	42×Φ20 / 1.65×Φ0.79	100±10	11/100	40×40×50 /1.57× 1.57×1.97	220×220×215 / 8.67×8.67×8.46
ODf	Din Female					
OPm	4.3-10 Male	38×Φ20/ 1.50×Φ0.79	70±10	8/100	40×40×50 /1.57× 1.57×1.97	220×220×215 / 8.67×8.67×8.46
OPf	4.3-10 Female					

0-3.8GHz 5W Dummy Load / Termination Load


P/N: VN-LD-3.8G-5W-OX




NM

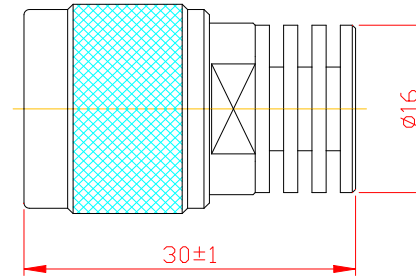


NM

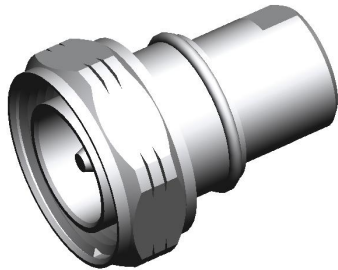


DM

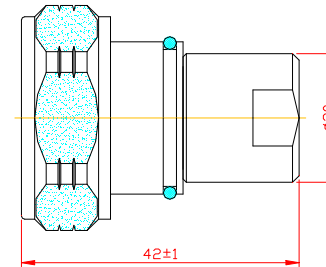

DM

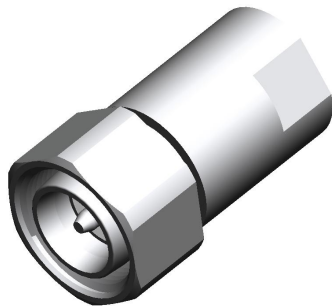

4.3M

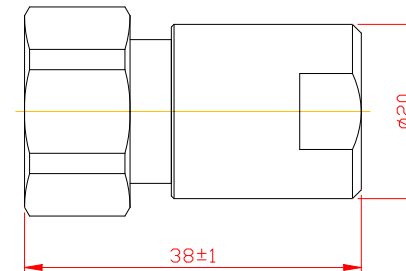

4.3M

3D Drawing

Product Image

Outline Drawing